




# DOCSIS 3.1 Cable Gateway with Wi-Fi 6 Voice



CODA5374


The powerful CODA5374 cable gateway forms the heart of the wireless home, featuring the next-generation to provide ultimate digital home experience: stunning 4K and 8K streaming, shutter-free VR applications, a flawless smart home, video conferencing and more. CODA5374 can meet virtually any home and small business networking need.

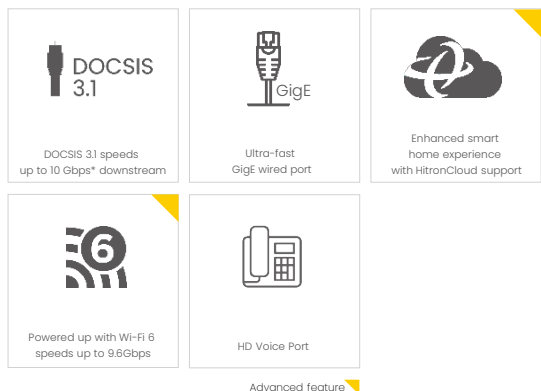

## Key Features

- DOCSIS 3.1 2x2 multi-carrier OFDM
- DOCSIS 3.0 32x8 channel bonding
- 2x2 2.4GHz 802.11ax and 2x2 5GHz 802.11ax dual band concurrent MU-MIMO internal antennas
- 16 SSIDs (8 SSIDs per radio)
- Individual configuration for each SSID
- Integrated DLNA Media Server for video, audio and images
- Four 1 GigE Ports
- Two HD Voice Ports
- Extensive operator control via configuration file and SNMP
- TR-069 and HNAP for easy setup and remote management
- Supports IPv4 and IPv6

## Application

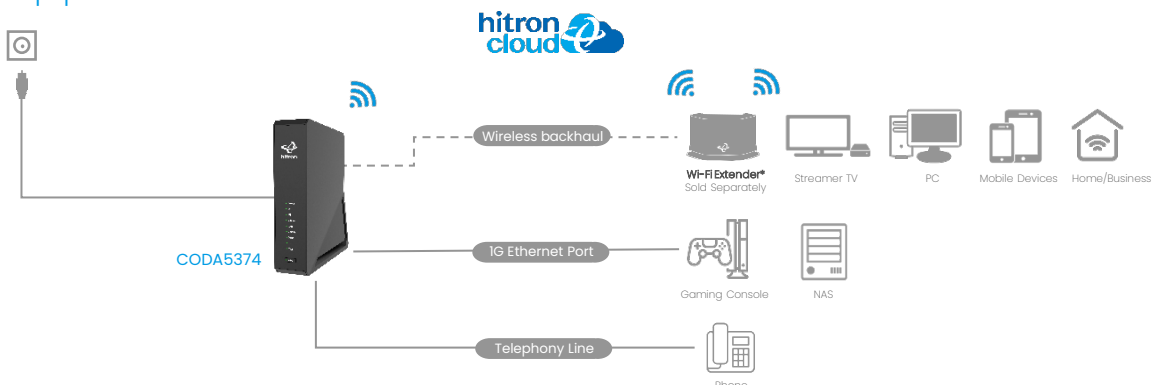

# Specifications

CODA5374

## Reception-Demodulation

- DOCSIS 3.1/3.0/2.0
- DOCSIS 3.1 Demodulation: Multi-carrier OFDM 16 to 4096QAM
- DOCSIS 3.1 Data Rate: Up to 5Gbps with 2 OFDM 192MHz
- Downstream Channels + 32 SC-QAM
- DOCSIS 3.0 Demodulation: 64QAM, 256QAM
- DOCSIS 3.0 Data Rate: Up to 1.2Gbps with 32 Bonded
- Downstream Channels
- Frequency (edge-to-edge): 108-1218/258-1218MHz
- Channel Bandwidth: 6MHz
- Signal Level: -15dBmV to 15dBmV

## Transmitter-Modulation

- DOCSIS 3.1/3.0/2.0
- DOCSIS 3.1 Modulation: Multi-carrier OFDMA BPSK to 4096QAM
- DOCSIS 3.1 Data Rate: Up to 700Mbps with OFDMA 96MHz Upstream Channels
- DOCSIS 3.0 Modulation: QPSK, 8QAM, 16QAM, 32QAM, 64QAM, and 128QAM (SCDMA only)
- DOCSIS 3.0 Data Rate: Up to 320Mbps with 8 bonded Upstream Channels
- Frequency: Fixed 5-85/5-204MHz
- Upstream Transmit Signal Level: +11 to 65dBmV

## Wi-Fi

### Wi-Fi Characteristics

- 802.11a/b/g/n/ac/ax
- 2T2R 2.4GHz 11ax and 2T2R 5GHz 11ax Dual Band Concurrent MU-MIMO with 574Mbps + 2.4Gbps PHY Rate
- 20/40/80/160MHz Channel Bandwidth
- High Power Design for Multi-radio Co-location
- Supports Standard 5GHz UNII Bands

### Wi-Fi Features

- Up to 8 SSIDs per Radio
- Prioritized QoS: WMM/WMM-PS
- Transmit Power Control by Service Provider
- WPS (Wi-Fi Protected Setup) PBC, PIN
- Airtime Fairness (ATF)
- Band Steering (BS)
- Dynamic Frequency Selection (DFS)
- Wi-Fi Output Power Range: Max permitted by FCC/IC

### Wi-Fi Security

- WPA-PSK
- WPA2-PSK (TKIP/AES)
- WPA3-SAE

### Routing Support

- Protocol Support: IGMP v3 for IPTV service capability
- MAC Address Filtering (IPv4/IPv6)
- IP Source/Destination Address Filtering (IPv4/IPv6)
- DHCP, TFTP and ToD clients (IPv4/IPv6)
- DHCP Server supports RFC 1541 (IPv4)
- DHCPv6 obtains Prefix from DHCPv6 Server through
- Prefix Delegation
- Firewall with Stateful Inspection (IPv4/IPv6)
- Hacker Intrusion Prevention and Detection
- Application Content Filtering (IPv4/IPv6)
- Complete NAT Software Implemented as per RFC 1631 with Port and Address Mapping (IPv4)
- DSLite Support for IPv4 In-home Support with IPv6 MSO Backbone
- 6RD Support for Quick IPv6 Deployment over IPv4 Backbone
- RIPv2 for Static IP Support
- LAN-as-WAN function for the deployment of standalone Wi-Fi Router mode

## Voice

### General Voice Features

- SIP v2 Call, SIP v2 Call Control
- MGCP
- DNS SRV
- Hook Flash Event Signaling
- RTP Audio Transport
- RFC2833 RTP Payload
- SIP INFO
- InBand DTMF Mode
- HD Voice Ports with 16kHz sampling rates
- Voice Audio Codecs
  - G.711 (a-law and mu-law)
  - G.722 (HD codec)
  - G.7231
  - G.726
  - G.728
  - G.729

### Management

- Protocol Support: TR-069, TFTP, SSHv2, SNMP v2, v3
- Web-based GUI Control, Configuration and Management
- Power-on Self-Diagnostic
- Hitron-proprietary MIBs for Extended Support on DOCSIS, Router Management, Wi-Fi Management
- HitronCloud cloud-based platform backend support

### Interfaces

- 1x RF F-Type 75Ω Female Connector
- 4x RJ-45 10/100/1000BASE-T Ethernet Ports
- 1x USB 3.0 Type A Connector with Host Interface
- 2x RJ-11 HD Voice Ports

### Mechanical

- LEDs: Power, DS, US, Status, LAN, Voice, Wi-Fi
- Factory Default Reset Button
- WPS Button
- Dimensions: 232mm (H) x 74mm (W) x 210mm (D)
- Net Weight: 1850 +/- 10g

### Environmental

- Operating Temperature: 0°C (32°F) ~ 40°C (104°F)
- Operating Humidity: 10% ~ 90% (Non-condensing)
- Storage Temperature: -40°C (-40°F) ~ 60°C (140°F)

### Electrical

- Input Power: 12VDC, 4A
- Power Adaptor: 100-240VAC, 50/60Hz
- Power Consumption: <48W
- Surge Protection
  - RF Input sustains at least 4KV
  - Ethernet RJ-45 sustains at least 4KV

### WiFi output power

- 2.4G : 30dBm
- 5G band1 : 30dBm
- 5G band2 : 23dBm
- 5G band3 : 23dBm
- 5G band4 : 30dBm

### Regulatory Compliance

- RoHS
- FCC
- NCC
- BSMI



Specifications subject to change without further notice. Product photo may differ.

DOCSIS 3.1 is a CableLabs standard for high speed Internet access that defines support for up to 10 Gbps downstream and 1 Gbps upstream. Actual cable operator network speeds will vary and will be less than the calculated maximum possible speeds. Actual upload and download speeds are affected by several factors including, but not limited to: the capacity of your cable operator's network, the services offered by your cable operator, cable and Internet network traffic, your computer equipment etc. Final speeds will also be limited by each device and the quality of its connection to the modem or router.

Trademarks owned by Hitron Technologies Inc. © 2024 Hitron Technologies Inc. All rights reserved.

Nov-2024